





HEAVY DUTY CASE

LARGE LCD TOUCH SCREEN

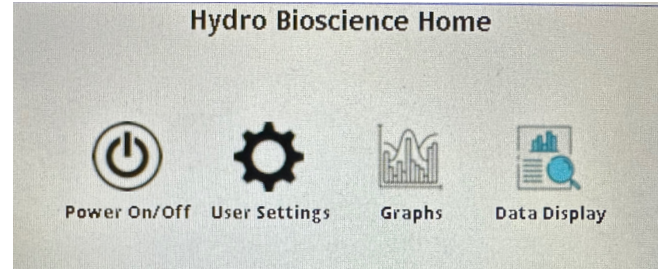

20kHz-140kHz	140kHz-260kHz	260kHz-380kHz	380kHz-500kHz
F: 99 kHz	F: 242 kHz	F: 299 kHz	F: 386 kHz
Fmin: 20 kHz	Fmin: 141 kHz	Fmin: 260 kHz	Fmin: 380 kHz
Fmax: 139 kHz	Fmax: 242 kHz	Fmax: 380 kHz	Fmax: 499 kHz
A: -92.01 dBV	A: -81.97 dBV	A: -89.75 dBV	A: -94.30 dBV
Amin: -96.53 dBV	Amin: -82.97 dBV	Amin: -95.18 dBV	Amin: -95.07 dBV
Amax: -5.997 dBV	Amax: -24.52 dBV	Amax: -24.92 dBV	Amax: -34.90 dBV

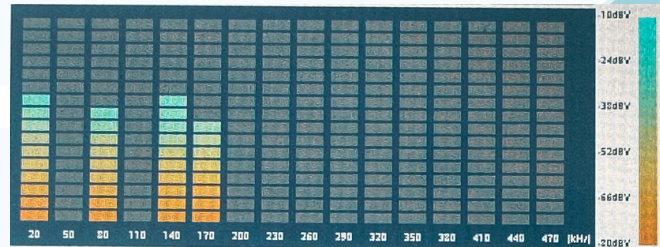

FEATURES

- Real time frequency and power level measurement and analysis
- Large high resolution Graphics LCD touch screen with real time clock
- Standard USB Type-C interface for firmware upgrades and Audio File transfers
- Ample built-in memory to capture and retain audio recordings for playback
- Built-in speaker with adjustable volume, Sound recording available in .wav format
- View data in real time with color graphics charts, graphs and instant values
- Very Wide Dynamic range from 10kHz to greater than 200kHz depending on hydrophone or microphone used
- Microphone and Hydrophone options available
- Bluetooth capable. Works with free Android applications.
- Exceptional battery life with auto shutoff and sleep mode
- Lightweight, ergonomic
- Heavy duty waterproof instrument carrying case supplied
- Available in black and field visibility orange

FIELD VISIBILITY ORANGE



1414 Century Ct
Piney Flats TN 37686
888.500.5011

info@hydro-bioscience.com
www.hydro-bioscience.com

Connect with HBS:

